

# 1000V DC Ferrule Fuses

## Size 36x127

gRB-gRC from 25 to 100 A

### Features/Benefits:


- Full range D.C. operation
- 36x127mm ceramic cylindrical body
- Blown-fuse indicator striker

### Catalog Numbers, Ratings

Size (Mm)	Current Rating $I_N$ (A)	Interrupting Rating	Watts Loss		Catalog Number		Ref. No.
			0.8 $I_N$	$I_N$	New	Old	
36 x 127	25	@ 1000V DC 100kA L/R = 20ms	5.3	9.4	CC 1051 CP gRB 36x127/25	D 100 gRB 006 VI	H083980
	32		6.4	11.5	CC 1051 CP gRB 36x127/32	D 100 gRB 008 VI	R086495
	40		6.5	11.6	CC 1051 CP gRB 36x127/40	D 100 gRB 010 VI	G089499
						D 100 gRB 012 VI	
	50		8.7	15.4	CC 1051 CP gRB 36x127/50	D 100 gRB 016 VI	H089500
	63		10.5	18.8	CC 1051 CP gRC 36x127/63	D 100 gRB 020 VI	J089501
	80		11.9	21.5	CC 1051 CP gRC 36x127/80	D 100 gRB 025 VI	A083651
	100		13.2	24.1	CC 1051 CP gRC 36x127/100	D 100 gRB 032 VI	Z083650

Blown fuse indicator minimum trip voltage: 50 V

### Dimensions

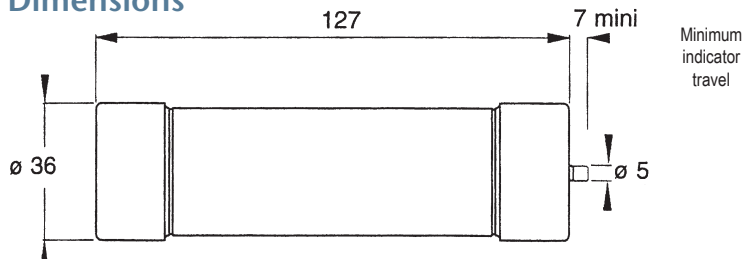

Trip force: 4.5N (1lb) at 0 mm - 2.5N (1/2) at 7 mm



### Ratings:

**Volts** : 1000VDC  
**Amps** : 25 to 100A  
**IR** : 100kA I.R.  
**L/R** : 20mSec

Max AC Voltage  
 (50/60Hz)  
 1500V @100k A I.R.