

# 1500V DC Ferrule Fuses

## Size 36x190

gRC-gRD from 40 to 100 A


### Features/Benefits:

- Full range D.C. operation
- 36x190mm ceramic cylindrical body
- CC 1591, with indicator
- CC 1500, without indicator

### Catalog Numbers, Ratings

Size	Current Rating $I_N$ (A)	Interrupting $I_N$ (A)	Watts Loss		Catalog Number	Ref. No.
			$0.8 I_N$	$I_N$		
36 x 190	40	@ 1500 VDC 60kA L/R = 60 ms	14	26	CC 1591 CP gRC 36x190/40	M080419
	50		16.5	30	CC 1591 CP gRC 36x190/50	N080420
	63		20.6	38	CC 1591 CP gRC 36x190/63	P080421
	80		18	33	CC 1591 CP gRD 36x190/80	N221134
	100		23	42	CC 1591 CP gRD 36x190/100	Y220154
	40	@ 1500 VDC 60kA L/R = 30 ms	14	26	CC 1500 CP gRC 36x190/40	H089477
	50		16.5	30	CC 1500 CP gRC 36x190/50	J089478
	63		20.6	38	CC 1500 CP gRC 36x190/63	K089479
	80		18	33	CC 1500 CP gRD 36x190/80	Q078007
	100		23	42	CC 1500 CP gRD 36x190/100	K078025

### Dimensions

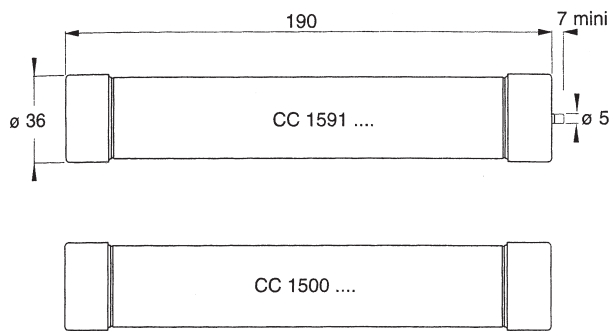

Trip Force: 4.5N (1lb) at 0 mm-2.5N (1/2lb) at 7mm (1/4") when so equipped



### Rating:

**Volts** : 1500VDC  
**Amps** : 40 to 100A  
**IR** : 60kA I.R. DC

Max AC Voltage (50/60 Hz) 3000V  
 @ 50k A I.R.

**CC1591** : L/R=60mSec  
**CC1500** : L/R=30mSec