

4000V DC Ferrule Fuses

Size 36x400

gRC from 0.8 to 20 A


Features/Benefits:

- Full range D.C. operation
- 36x400mm ceramic cylindrical body

Catalog Numbers, Ratings

Size	Current Rating I_N (A)	Interrupting I_N (A)	Watts Loss		Catalog Number	Ref. No.
			0.8 I_N	I_N		
36 x 400	.08	@ 4000 V DC 30kA L/R = 20 ms	1.5	2.5	CC 4000 CP gRC 36x400/0.8	Z220293
	1		1.6	2.7	CC 4000 CP gRC 36x400/1	R221137
	1.5		2.4	14.1	CC 4000 CP gRC 36x400/1.5	S221138
	2		3.0	5.0	CC 4000 CP gRC 36x400/2	Z089423
	3.15		3.9	6.4	CC 4000 CP gRC 36x400/3.15	T221139
	4		6.0	10	CC 4000 CP gRC 36x400/4	A089424
	5		9.6	16	CC 4000 CP gRC 36x400/5	Y098461
	6		11	19	CC 4000 CP gRC 36x400/6	E099847
	8		12	22	CC 4000 CP gRC 36x400/8	V221140
	10		13	23	CC 4000 CP gRC 36x400/10	G098469
	12		15	26	CC 4000 CP gRC 36x400/12	C098396
	16		15	27	CC 4000 CP gRC 36x400/16	Z083052
	20		18.6	33	CC 4000 CP gRC 36x400/20	F099848

Dimensions

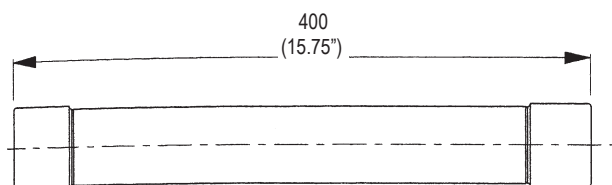

Ratings:

Volts : 4000VDC

Amps : .8 to 20A

IR : 30kA I.R. DC

L/R : 20mSec

4000VAC @ 50kA I.R.