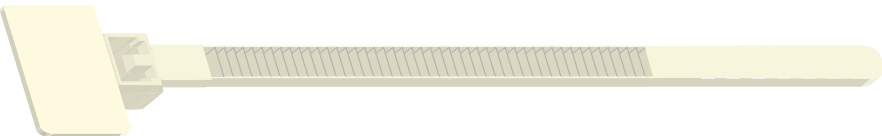


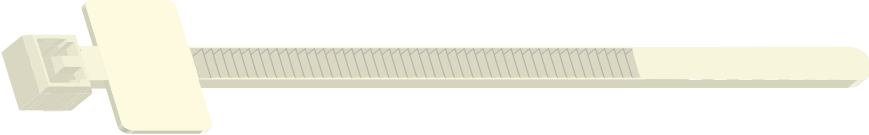








Colliers de serrage avec plaquette d'identification

Matière: Polyamide 6.6 (stabilisés UV) selon MIL S-23190 E, UL 94 V-2,
Température d'utilisation: -40°C à +80°C

Référence blanc	Dimensions mm			Résistance à la traction		Conditionnement
	Longueur	Largeur	Ø max. du faisceau	KP	N	
 <p style="text-align: right;"><i>Plaquette: 20,4 x 9,1</i></p>						
 06320	110	2,5	18	8,1	79	100
 06321	210	2,5	50	8,1	79	100
 <p style="text-align: right;"><i>Plaquette: 25,4 x 8</i></p>						
 06330	100	2,5	18	8,1	79	100
 06331	200	2,5	50	8,1	79	100
 <p style="text-align: right;"><i>Plaquette: 13 x 28</i></p>						
 06322	188	4,8	43	22	216	100
 06323	270	4,8	68	22	216	100
 06324	340	4,8	85	22	216	100

Colliers de serrage à clipser

Matière: Polyamide 6.6, UL 94V-2

Référence blanc	Dimension mm					Résistance		Conditionnement
	Longueur	Largeur	Ø Trou	Épaisseur	Ø maxi	KP	N	
06386	110	2,5	4,8	2,4	18	8,1	79	100
06387	130	3,2	4,8	2,4	28	13	127	100
06388	150	3,3	5,2	2,8	38	13	127	100
06389	200	4,6	6,3	3,6	50	22	216	100