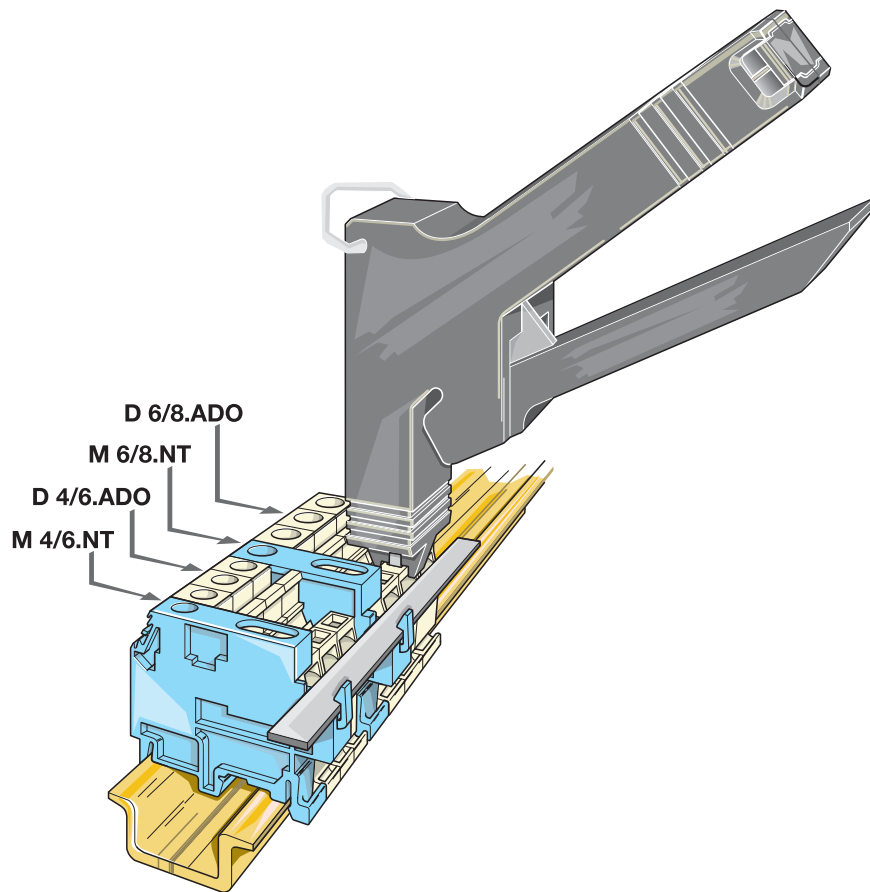


Compatibility of ADO/ Screw clamp terminal blocks with Screw clamp/Screw clamp switch terminal blocks for neutral circuits

Standard ADO/Screw clamp terminal blocks with 6 and 8 mm spacing are compatible with Screw clamp/Screw clamp switch terminal blocks for neutral circuits.








Wire connection and removal is possible with busbar in its place.



ADO/Screw clamp terminal blocks for neutral circuits

ADO/Screw clamp terminal blocks with blue body can be used for neutral connection.

Blue colour permits a good identification.

	<p>D 2,5/5.N.ADO Spacing 5 mm + 0,05 (.198")</p>  <p>Rated wire size 1 mm² D 2,5/5.N.ADO 1SNA 199 556 R2500</p>	<p>D 4/6.N.ADO Spacing 6 mm + 0,05 (.238")</p>  <p>Rated wire size 1,5 mm² D 4/6.N.ADO 1SNA 199 036 R1700</p>	<p>D 6/8.N.ADO Spacing 8 mm + 0,05 (.315")</p>  <p>Rated wire size 2,5 mm² D 6/8.N.ADO 1SNA 199 044 R2700</p>	<p>D 6/8.N.ADO3 Spacing 8 mm + 0,05 (.315")</p>  <p>Rated wire size 4 mm² D 6/8.N.ADO3 1SNA 399 319 R1700</p>	<p>D 2,5/5.D2.N.ADO Spacing 5 mm + 0,05 (.200")</p>  <p>Rated wire size 1 mm² D 4/6.D2.N.ADO 1SNA 399 899 R0600</p>	
	<p>D 4/6.D2.N.ADO Spacing 6 mm + 0,05 (.238")</p>  <p>Rated wire size 1,5 mm² D 4/6.D2.N.ADO 1SNA 199 244 R0400</p>	<p>D 6/8.D2.N.ADO Spacing 8 mm + 0,05 (.315")</p>  <p>Rated wire size 2,5 mm² D 6/8.D2.N.ADO 1SNA 399 602 R1400</p>	<p>Characteristics and accessories of these blocks are described in standard ADO/Screw clamp block pages.</p>			