



**Pluggable terminal blocks**  
**Screw clamp**  
**Female plugs**



Plug shape  
**TILE (omnicontact)**



**CPFT2 / ...**  
**Plugs,**  
**wires parallel to connection**

Spacing 5,08 mm .200"

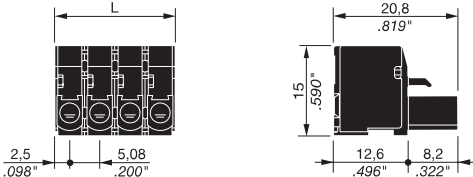

**CPFT2 / R-...**  
**Plugs,**  
**wires perpendicular to connection**

Spacing 5,08 mm .200"

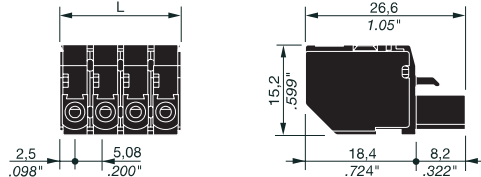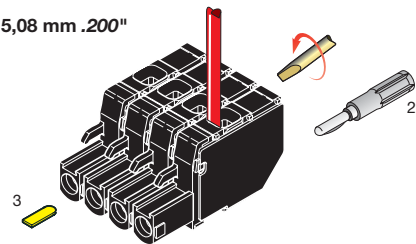

Number of poles	Type	Part number	L mm
<b>Spacing 5,08 mm .200" black</b>			
2	CPFT2 / 2	1SNA 094 302 R2100	10,08
3	CPFT2 / 3	1SNA 094 303 R2200	15,16
4	CPFT2 / 4	1SNA 094 304 R2300	20,24
5	CPFT2 / 5	1SNA 094 305 R2400	25,32
6	CPFT2 / 6	1SNA 094 306 R2500	30,40
7	CPFT2 / 7	1SNA 094 307 R2600	35,48
8	CPFT2 / 8	1SNA 094 308 R0700	40,56
9	CPFT2 / 9	1SNA 094 309 R0000	45,64
10	CPFT2 / 10	1SNA 094 310 R2400	50,72
11	CPFT2 / 11	1SNA 094 311 R1100	55,80
12	CPFT2 / 12	1SNA 094 312 R1200	60,88
13	CPFT2 / 13	1SNA 094 313 R1300	65,96
14	CPFT2 / 14	1SNA 094 314 R1400	71,04
15	CPFT2 / 15	1SNA 094 315 R1500	76,12

Other pole numbers, please consult us.

Number of poles	Type	Part number	L mm
<b>Spacing 5,08 mm .200" black</b>			
2	CPFT2 / R-2	1SNA 094 352 R2200	10,08
3	CPFT2 / R-3	1SNA 094 353 R2300	15,16
4	CPFT2 / R-4	1SNA 094 354 R2400	20,24
5	CPFT2 / R-5	1SNA 094 355 R2500	25,32
6	CPFT2 / R-6	1SNA 094 356 R2600	30,40
7	CPFT2 / R-7	1SNA 094 357 R2700	35,48
8	CPFT2 / R-8	1SNA 094 358 R0000	40,56
9	CPFT2 / R-9	1SNA 094 359 R0100	45,64
10	CPFT2 / R-10	1SNA 094 360 R0600	50,72
11	CPFT2 / R-11	1SNA 094 361 R2300	55,80
12	CPFT2 / R-12	1SNA 094 362 R2400	60,88
13	CPFT2 / R-13	1SNA 094 363 R2500	65,96
14	CPFT2 / R-14	1SNA 094 364 R2600	71,04
15	CPFT2 / R-15	1SNA 094 365 R2700	76,12

Other pole numbers, please consult us.

Range of CPFT2 plugs, 2 to 24 pole, perpendicular and parallel to the connection with test point for dia. 2 and dia. 2.3 mm plugs.

Body UL94 V0

**Characteristics**

Wire size			
	IEC	UL	CSA
Rigid*	0,2-4 mm <sup>2</sup>	24-12 AWG	24-12 AWG
Flexible*	0,22-2,5 mm <sup>2</sup>		
Rated voltage			
V	250	300	300
Rated current			
A	12	15	15
Rated wire size			
	2,5 mm <sup>2</sup>	12 AWG	12 AWG

**Other characteristics**

Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
7,5 mm .295"	3,5 mm .137"	0,4 Nm 3.5 lb.in	IP 20 NEMA 1
Max. working temperature			100° C
Contact resistance			< 5 m Ω

**Approvals**



**Accessories**

	Type	Part number	P/N black	P/N Grey	Type	Part number	P/N black	P/N grey
1	Flanges assembly	L + R + M	2,5 screw	BCPF	axis spacing 5.08 mm	1SNA 178 072 R0500		
2	Test plug			FC2	dia. 2 mm	1SNA 007 865 R2600		
3	6 coding peg kit			COCF	1SNA 199 320 R0400			
R	Markers	Marking method			RB5A sticker marking 5 mm width			